

Safe-Seal B125

Ductile iron B125 single seal access covers

Wrekin's range of single-seal BS EN 124:1994 B125 Group 2 Manhole Covers have been designed to combine high strength and light weight and include additional features such as a single seal labyrinth and safety enhancements.



Illustrated: DMS1B2/6060/K

- For use in a Group 2 Class B125 environment
- All fully comply with BS EN 124:1994 and are Kitemarked by BSI (except 1200 x 600mm version)
- A patented safety keyway prevents accidental disengagement during the lifting operation. Also compatible with standard D400 lifting keys.
- Incorporates a single seal labyrinth arrangement to help prevent odour escapes and water ingress (except 1200 x 600mm version)
- Manufactured from strong and highly durable ductile iron
- Slide out cover designed for ease of removal

Range details



| Wrekin product code | Clear opening size (Cx D mm) | Frame depth (mm) | Over frame size (Ax B mm) |
|---------------------|------------------------------|------------------|---------------------------|
| DMS1B2/45D* | 450 diameter | 40 | 550 x 550 |
| DMS1B2/4545/K | 450 x 450 | 40 | 555 x 555 |
| DMS1B3/4545/K | 450 x 450 | 75 | 555 x 555 |
| DMS1B2/6045/K | 600 x 450 | 40 | 690 x 530 |
| DMS1B3/6045/K | 600 x 450 | 75 | 705 x 555 |
| DMS1B2/6060/K | 600 x 600 | 40 | 690 x 690 |
| DMS1B3/6060/K | 600 x 600 | 75 | 705 x 705 |
| DMS1B3/60D/K | 600 diameter | 75 | 692 x 692 |
| DMS1B2/6767/K | 675 x 675 | 55 | 800 x 800 |
| DMS1B3/7560/K | 750 x 600 | 75 | 850 x 700 |
| DMS1B2/7575/K | 750 x 750 | 50 | 850 x 850 |
| DMS1B3/9060/K | 900 x 600 | 75 | 1000 x 705 |
| DMS1B3/9090/K | 900 x 900 | 75 | 1000 x 1000 |
| DMS0B3/1260* ** | 1200 x 600 | 75 | 1300 x 740 |

* denotes non-kitemarked products

** denotes non-sealed / plain seated products

Available options: SW or FW badging to 600 x 450 and 600 x 600 products

Special badging, ventilation holes, locked covers, sealing plates, rubber seals and safety grilles.

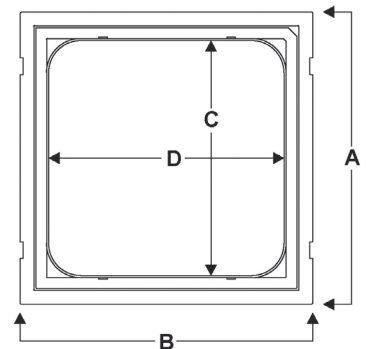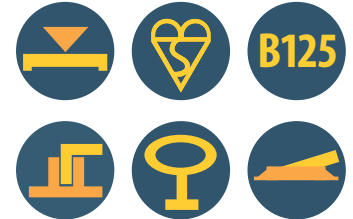

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves that the above data is current.
3. Wrekin cannot be held responsible for the performance of these products as conditions of use are beyond our control.
4. Installation details are available on request.