


Eco Slate “At a Glance Guide”

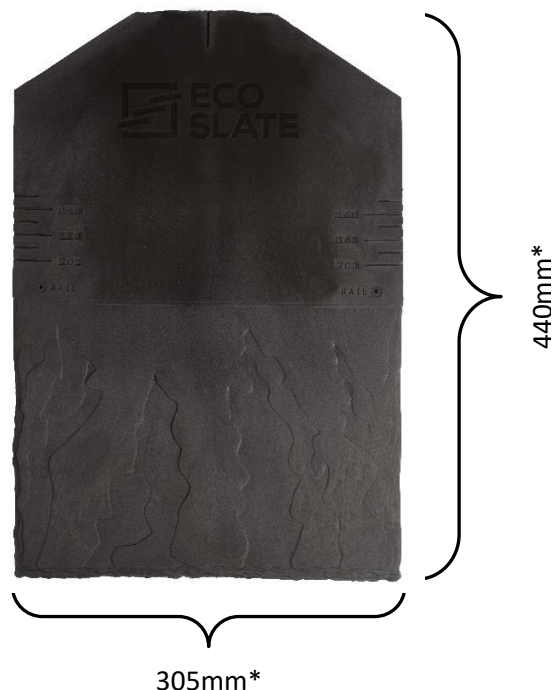

Price is per box of 16 slates

>20° pitch = 16 slates per m², 11.2 Kgs/m² 210mm guide

15-19° pitch = 17 slates per m², 11.9 Kgs/m² 190mm guide

10-14° pitch = 19 per m². 13.3 Kgs/m² 170mm guide

Vertical applications not covered by BBA or warranty.

Each slate weighs 700 grams (approx.)

Slates are 305mm x 440mm*. Overlap: slates have embossed guides for either 170mm, 190mm and 210mm overlap. Thickness 6mm leading edge, 3mm top*

Ridge / hip 7 slates/ linear metre

Eaves (e.g. above gutter) starter row add 3 slates per linear metre

Subsequent rows require half slate (cut with knife) to start each row to ensure ‘brick’ bond pattern.

Colour: Slate Grey, Old World Red, Cumbrian Green

Slates **MUST** be installed on an 18mm OSB or Ply board covered with a breathable roofing membrane **NOT** bitumen

Full installation guide [available here](#)

*nominal

Features & Benefits

- BBA Certified
- Flexible
- Quick & easy to install
- Ideal for low pitches down to 10°
- Self-bonding
- Lightweight
- Recycled & recyclable (plastic)
- Class “A” fire rated (BS476.Part 3)
- No breakages, no waste
- 50-year non-prorated warranty
- No maintenance (no moss or mildew)
- Can be used for ridges, valleys & caps
- Improves insulation to a roof more than traditional slate
- Un-breakable, cannot be vandalised, Class 4 impact rating
- Cuts with a knife or snips
- Easy to install with roof windows or solar panels
- The slate is designed to withstand winds of 110mph

<http://www.ecoroofingsystems.co.uk>

SKU	Quantity
Box	16 slates per box
Boxes per pallet	91

